

**HITCHIN TOWN HALL**  
**MUSEUM FEASIBILITY STUDY**

**Report to Cabinet**

8 October 2009



**buttressfulleralsoptions** · architects

## CONTENTS

Background

Executive summary

Introduction

Commentary on condition

Suitability for museum use

Location

Accessibility

Internal circulation

Ownership

Existing museum accommodation

Existing community uses

Option study

Option A

Option B

Option C

Option D

Consultation

Identification of preferred Option

Preferred Option

General Description

Structural Interventions

Services requirements

Health and safety implications

Cost plan

The way forward

Milestones to successful project delivery

Key decisions to be made

Conclusion

Appendices

Cost Reports

Risk register

Preferred Option – drawings and images



## BACKGROUND

This report has been prepared on the instructions of North Hertfordshire District Council Museums Service. The report follows the adoption of the Cragg Management Services Report (April 2009), on the possible relocation of North Hertfordshire Museums to the Town Hall, which investigated the Options for the future of the Museums within North Hertfordshire and builds on the Arts, Museums and Heritage Strategy 2007.

The purpose of this current report is not to review the findings of the earlier reports but to look at the key recommendation, that the feasibility of relocating the Museums at Letchworth and Hitchin into Hitchin Town Hall be investigated in detail by a consultant team.

This report therefore seeks to address the spatial requirements and layout for the new museum (based on the existing provision at Hitchin Museum and Letchworth Museum) and the office accommodation at the Museum Services Store on Burymead Road. It is a fundamental part of the brief for this study that some continued provision for community use be incorporated into the design study.

The consultant team involved in the preparation of this study comprises the following:

Architects:	Buttress Fuller Alsop Williams
Structural Engineers:	Thomasons
Services Engineers:	Silcock Leedham
Quantity Surveyors:	Appleyard & Trew
CDM Coordinators:	Buttress Fuller Alsop Williams

In view of the architects established expertise in Museum design, an Exhibition Designer has not been included within the team at this stage.

## EXECUTIVE SUMMARY

The following feasibility report shows how the Hitchin Town Hall building can be utilised as a Museum with community uses integrated into the scheme.

Following the development of a number of options, and stakeholder consultation, a 'preferred option' was identified and further developed.

The Town Hall building is a good size and location to allow a museum to be developed on the site. The building is generally sound in condition and able to be adapted for this use.

The report identifies an appropriate spatial arrangement, which will create an exciting new museum facility, whilst consolidating existing provision into one venue. This scheme also maintains a valued community provision as part of the scheme.

Costings for the scheme are detailed within the report. An overall construction cost of £2,408,465 including professional fees, and a fitout budget of £1,033,373 including design fees giving an overall expected outturn cost of £3,441,838 ex VAT have been established.

This shows that the overall concept of a museum on the Hitchin Town Hall site is both physically and economically feasible.

From a timescale point of view, the project could be delivered as early as April 2012.



## INTRODUCTION

### Scope of Report

This report has been produced by Buttress Fuller Alsop Williams - Architects as a report to identify if it is feasible for the introduction of a museum into the Hitchin Town Hall building – retaining some community use. This report will briefly look at the existing building and its appropriateness for museum use, and make comment on a number of issues which require careful consideration to allow this vision to be facilitated.

### Commentary on Condition

A brief inspection of the building was carried out by Neal Charlton of Buttress Fuller Alsop Williams - Architects, and Jane Hogg of Thomasons structural engineers on Thursday 6<sup>th</sup> August 2009. This comprised a visual inspection of the building from accessible rooms and at ground level externally.

The building's physical condition was noted as well as overall defects which inhibit public use, such as lack of accessibility and poor fire strategy.

The conclusion of this brief inspection was that the building is generally sound and suitable for adaptation and reuse. The following defects were noted:

- Lack of accessible entrance
- Lack of vertical access (lift etc)
- Dampness to basement areas – particularly the stage
- Numerous small level changes throughout the building
- Poor drainage
- Minor defects noted to Workman's Hall roof
- Poor decorative condition was noted throughout the building



*Main Hall and Stage – Hitchin Town Hall*



## SUITABILITY FOR MUSEUM USE

### Location

The position of Hitchin Town Hall within the town centre allows the building to be easily accessed using the town's connections to the public transport network and road links.

Considering the proximity of town centre facilities, the adjacent multi-storey car park negates the need for car parking upon the site.

There is however a need to consider groups who would visit the site if used as a museum. School parties and organised groups often arrive at museums on coaches. These need to drop off groups in close proximity to the museum entrance.

### Internal Circulation

The internal circulation of the building is not suitable at present for public use, with many level changes and complex fire separation arrangements. In addition there is the need to simplify the circulation in the museum exhibit areas.

Detailed analysis of the building has lead to four differing arrangements for the introduction of new, enhanced vertical circulation within the buildings. These form the basis of the four options proposed. The four key lift positions are:

1. Externally, to the rear of the front – two storey element of the Town Hall
2. Internally within the same two storey element – to the left hand side. (replacing an existing emergency escape)

3. Within the main hall (linked to a new mezzanine)
4. Within the central bar area (linked to a new corridor at first floor level)

These are illustrated on the following page.

### Ownership

Whilst the Town Hall itself is in the ownership of North Hertfordshire District Council, the Workman's Hall is under the guardianship of The Hitchin Town Hall Gymnasium Trust.

It should be noted that the following statement was recorded at NHDC cabinet meeting held on 16<sup>th</sup> December 2008.

*"The Objects of the Charity are:*

*Upon trust to use or permit to be used as a Gym for the benefit of the residents of Hitchin and for other purposes mentioned in s6(3) Museums and Gymnasiums Act 1891 and also for any other (charitable) purpose for the benefit of the North Herts District for which NHDC can lawfully use building and land vested in them.*

*These Objects are quite widely drafted. The Museums and Gymnasiums Act 1891 has been repealed and replaced by the Public Libraries and Museums Act 1964 and the Local Government (Miscellaneous Provisions) Act 1976. Broadly, there are powers in these two Acts for local authorities to provide recreational facilities, museums and art galleries."*



## EXISTING MUSEUM ACCOMMODATION

The existing museums at Hitchin and Letchworth house a number of different types of accommodation. For the purposes of this feasibility study these have been separated into generic room types. These have areas which represent the total area attributed to each room type.

It should be noted that it is beyond the scope of this report to identify the differing stories told within the museums and speculate on which of these are accommodated within the Town Hall complex, but exhibitions will be defined into the following types:

- Exhibition – display of artefacts (generally in cases)
- Gallery – display of artwork (generally two-dimensionally)
- Temporary exhibition – for the short term display (gallery or exhibition)

Where areas are particularly suited for certain functions these may be indicated.

Following analysis of the existing accommodation, the following schedule has been produced to provide a comparison with the differing options to be considered. It is worth considering that the accommodation housed within the existing buildings may create duplicated facilities – a good example being the shop or toilet facilities, where we do not need to simply add the figures together and there may be the opportunity to reduce them.

	Retail (shop & cafe) inc. entrance	[ 32m <sup>2</sup> ]
	Exhibition / Gallery	[430m <sup>2</sup> ]
	Temporary exhibition / flexible use	[128m <sup>2</sup> ]
	Community use (inc. education)	[ 78m <sup>2</sup> ]
	Offices	[ 60m <sup>2</sup> ]
	Storage	[ 60m <sup>2</sup> ]
	Toilets	[ 20m <sup>2</sup> ]
	Circulation	[ N/A ]

## EXISTING COMMUNITY USES

Across the buildings there are a number of community uses which are accommodated. Some of these have been established for generations, and are part of the rich and diverse activities offered within North Hertfordshire District Council's premises. Whilst there is no wish to displace any groups, it is a clear and strategic decision to refurbish the Town Hall complex with museum use at the heart of the refurbishment. To achieve this it is recognised by the Council that some of the activities undertaken at the Town Hall must be accommodated elsewhere to facilitate the museum use and there is a willingness to assist with this process.

The options to be considered identify differing schemes which retain differing spaces which may retain a number of these community uses. In order to consider options, this report looks at the identification of differing spaces to be retained for community use, rather than the retention of the uses themselves. It should be noted that some of the spaces will lend themselves to new community use as well as existing uses.

The main current spaces which house community use have been identified as:

- Main Hall [280m<sup>2</sup>]
- Gymnasium [214m<sup>2</sup>]
- 'Lucas' room (meeting room) [ 53m<sup>2</sup>]
- 'St John's' room [ 73m<sup>2</sup>]
- Education rooms (within museums) [ 78m<sup>2</sup>]

Analysis of the room use has found that the Town Hall is underused generally, with the Main Hall used for approximately 50% of the available time; and the least used space being the St John's room which is used for 1½ hrs per week.

In addition, the size of the gymnasium is restricted and is far smaller than the size recommended for most indoor sporting activities. It is best suited for fitness and martial arts classes at a recreational level due to severe restrictions both in floor area and ceiling height.





## OPTION STUDY

Four options for the town hall were initially developed for consultation with stake holders. These were all based on the exploration of the use of existing spaces in differing ways. The schemes progressed in complexity – with Option A being simpler than Option D. These Options are described and illustrated below.

The options were discussed at meetings with the museums staff and a public consultation meeting to establish the most desirable elements prior to further design development and the establishment of robust costings. The resulting ‘preferred option’ is described and illustrated on pages 19 to 31 of this report.



## OPTION A

### Entrance:

Arrival for this option is proposed via the use of the passage to the left of the Brand Street Elevation. It is proposed that this passage is enclosed, with a glazed roof but it is noted that there is a shared egress from adjacent shops fronting Brand Street. The entrance is proposed via the current fire exit to the bar.



*How entrance could look*

### Circulation:

The position identified for a lift is to the two-storey element at the front of the Town Hall. The lift would replace the emergency stair from the hall gallery. It should be noted the only lift that is able to fit within this space is a platform lift rather than a full passenger lift. This is a rising floor plate where the walls stay still.

Horizontal circulation is supported by the use of ramps to accommodate minor changes in levels and the introduction of a glazed link at first floor level, linking the Main Hall with the Workman's Hall.

### Museum Layout:

The museum takes the primary role in this scheme, with the Main Hall being used for exhibition; the existing kitchen used for the temporary exhibition; and the gymnasium used as a gallery. This allows a clear circulation flow between these spaces and is centred around the shop at the entrance.

### Community Uses:

The community uses identified within this position are as follows:


- Temporary exhibition – used for short term exhibitions, some of them community use
- Education suite (first floor) – used by differing groups throughout the day as well as evenings due to direct access from the entrance
- Meeting room (Lucas room) – retention of the Lucas room will enable many groups to continue to use the Town Hall complex

### Extent of Alteration

The provision of a large mezzanine to the Main Hall is the significant intervention. This results in the loss of the sprung floor. In addition, the glazed link is also a new addition which in this option is accompanied by a roof terrace over, what is now, the kitchen.



# Hitchin Town Hall – Museum Feasibility Study: Report to Cabinet

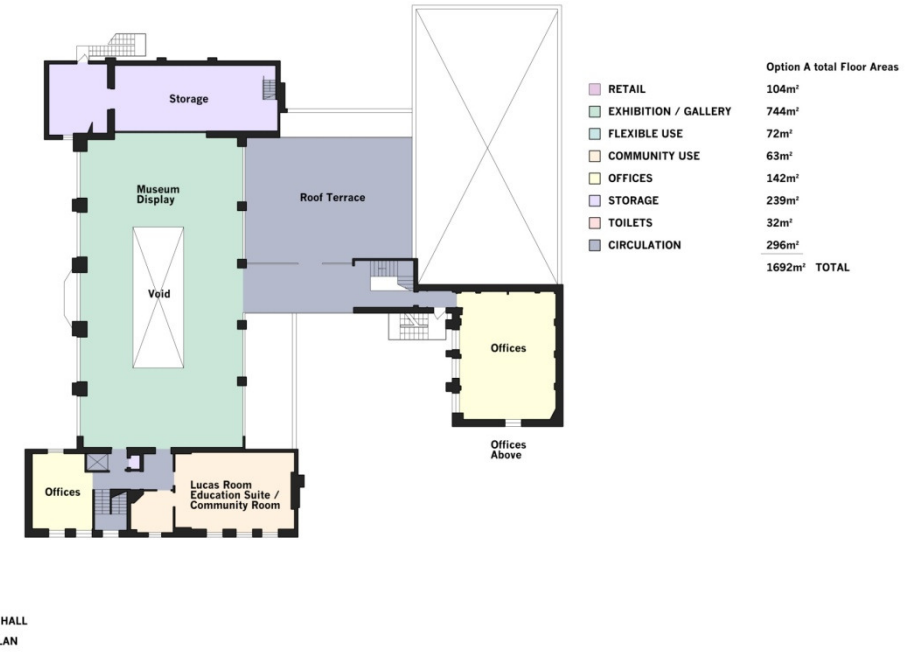

## OPTION B

### Entrance:

This option utilises the Town Hall entrance which has been made accessible by the introduction of a ramp and stair addition. To facilitate this, the street has been adjusted to create a plaza of shared street directly in front of the entrance. Shared street is a concept of bringing the traffic up to the pedestrian level of the footpath. Slowing the traffic down and mixing the pedestrians and vehicles on a high quality surface.



*Ramp and stair access  
with new plaza to street*

### Circulation:

This scheme uses two new lift and stair cores. One is an external core to the Grammar School Walk side of the building. The use of two circulation cores allows good flow between the floors. The two circulation floors negate the need for a link between the two, two-storey areas of the building.

### Museum Layout:

The main exhibition within the Main Hall and the gallery within the gymnasium are separated by the cafe. The temporary gallery is to the rear of the gym and an additional flexible use within the Main Hall, by the stage – which is retained.

### Community Uses:

Option B retains community use in the following areas:


- Stage and reduced sized hall – used for small theatre productions, film shows etc.
- Education suite (first floor) – used by differing groups throughout the day as well as evenings due to direct access from the entrance
- Meeting room (Lucas room) – retention of the Lucas room will enable many groups to continue to use the Town Hall complex

### Extent of Alteration:

The large mezzanine to half of the Main Hall is a significant intervention. In addition, this scheme also requires the provision of two stair and lift cores, but this negates the need for a link structure.



# Hitchin Town Hall – Museum Feasibility Study: Report to Cabinet

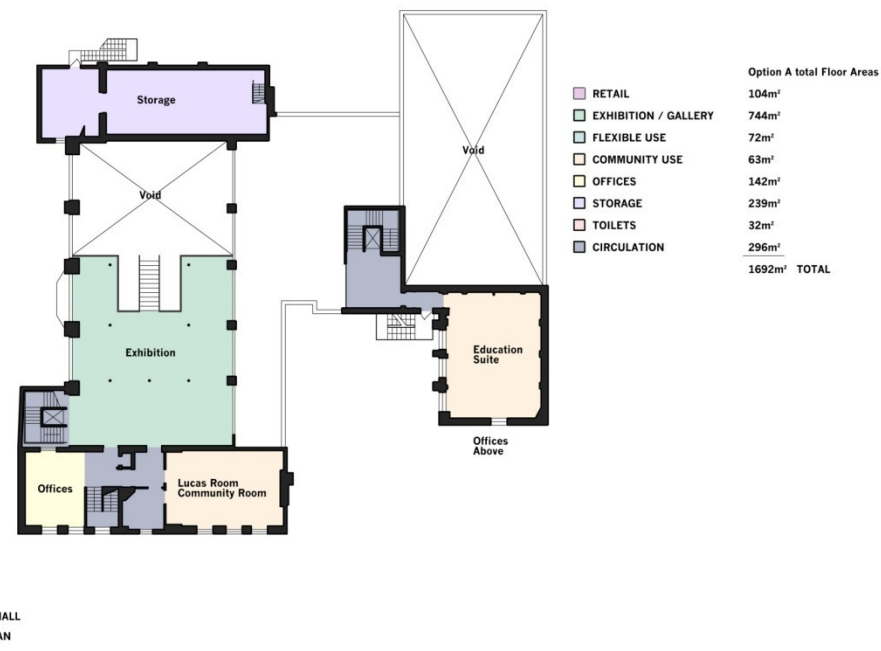

## OPTION C

### Entrance:

As with Option A, this scheme proposes the use of the side entrance and the provision of a glazed street. This is highlighted at the street front by the use of entrance signage adjacent to the adjoining property. This allows the existing bar area to be utilised as the entrance/shop enabling people to move in a number of directions from this central position.

### Circulation:

Vertical circulation is shown as being introduced within the Main Hall, allowing optimum circulation within the museum exhibit, which includes the introduction of a large mezzanine to the whole hall. At first floor level, the Main Hall is linked to Workman's Hall by a new glazed link, the staircase adjusted to ensure level access through.

### Museum Layout:

The museum is centred on the Main Hall, with the introduction of a large mezzanine as noted above. In addition the stage is lowered to allow the stage area to house exhibits. This area is indicated as used for temporary exhibitions at ground level, spilling into the Main Hall, under a new staircase. The mezzanine continues into the stage at first floor level. In addition the exhibition extends into the current kitchen area.

### Community Uses:

As with Option A, the cafe is located at the front of the Town Hall, in the old entrance foyer, with doors replaced by a glazed screen.


Option C retains community uses in the following areas:

- Gym to be used as community hall used for larger meetings. The ability to utilize it as a gym has been lost as there is no changing or associated storage.
- Local history study centre created
- Temporary exhibition area
- Retention of the Lucas room – retention will enable many groups to continue to meet within the Town Hall complex

### Extent of Alteration:

This scheme inserts the largest intervention in the form of a large mezzanine into the Main Hall. This extends into the stage area. In addition the lowering of the stage creates the largest possible publically accessible area at ground floor – aiding accessibility. This is however, a significant structural alteration which will compromise the basement area below the stage and limit its use.



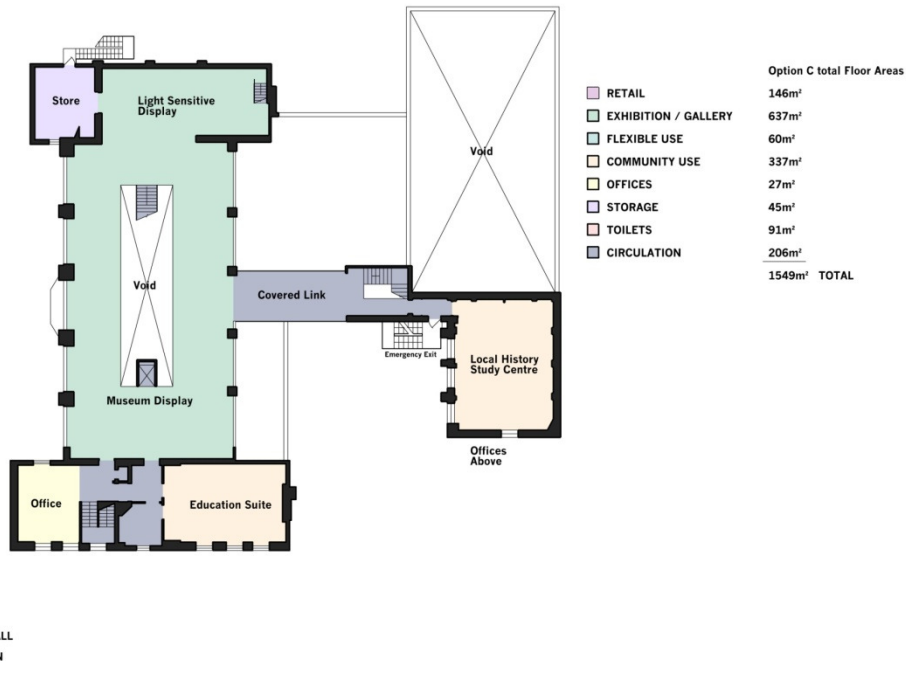

## OPTION D

### Entrance:

This final scheme uses both the Town Hall entrance and the side entrance to allow distinct entrances for museum and temporary display. As with Option B, the creation of ramp and stairs to the Town Hall entrance has resulted in the proposal to create a shared access plaza on the street.

### Circulation:

Vertical circulation within this option is provided by a passenger lift and stair, either side of the cafe/shop, and a new stair to the exhibition mezzanine in the Main Hall. In addition the stair to the front of the Town Hall is retained for separate access to the Lucas Room. The link between the new mezzanine and the Workman's Hall is once again utilised.

### Museum Layout:

As with Option C, a large mezzanine is created, with additional space created within the stage area. This mezzanine also houses an education suite (where the existing gallery is). This allows these new rooms to be used in conjunction with the Lucas room, creating a versatile suite of rooms.

### Community Uses:

Option D retains community uses in the following ways:

- Learning suite – this includes the retention of the Lucas room
- Temporary exhibition situated centrally within the Main Hall and associated separate entrance.

### Extent of Alteration:


The creation of two entrances to the street has the most significant effect on the streetscape. This includes the shared access plaza which allows adequate external circulation.

As with other options the mezzanine and first floor link are significant, but the lowering of the stage has been avoided with the stage used for storage.





# Hitchin Town Hall – Museum Feasibility Study: Report to Cabinet

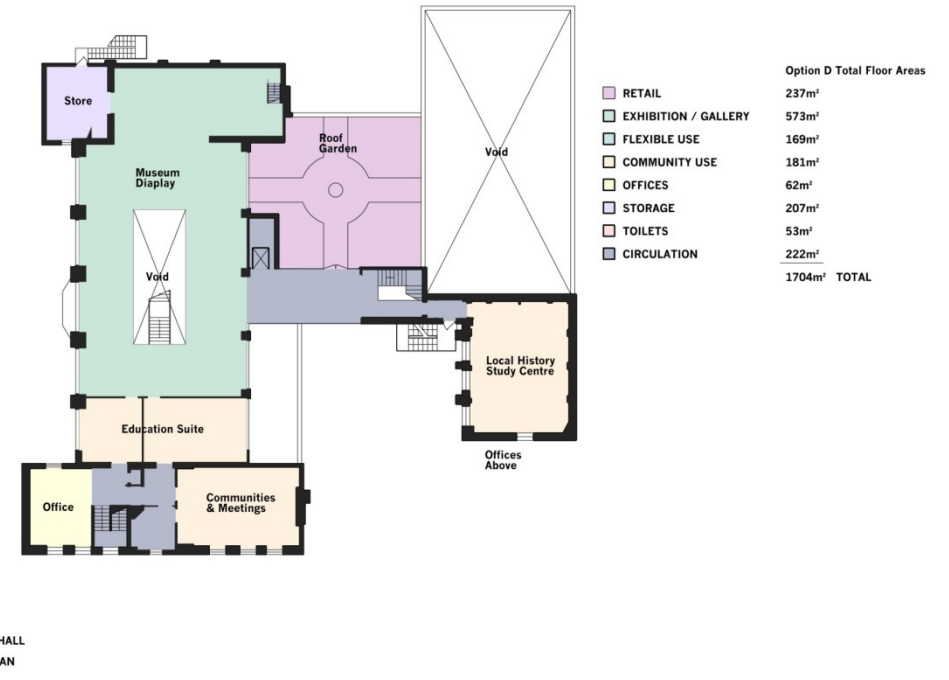

## CONSULTATION

The four options were discussed at an open public meeting, and evaluated by the Museums service for suitability on 9 September 2009. This allowed a 'preferred option' to be identified and further developed and costed. This preferred option is described, illustrated and costed on the following pages after further development.

## IDENTIFICATION OF PREFERRED OPTION

Having looked at many differing solutions the four options tabled above reflect a diverse mix of solutions which provide the accommodation as defined in the brief.

The identified 'preferred option' was then developed to address the comments of different stakeholders. This scheme is illustrated on the following pages and shows how a feasible solution can be provided which addresses a number of key issues. These are:

- The inclusion of a significant usable community space
- The provision of a new entrance leading to the centre of the site
- The introduction of a large mezzanine to the main hall space to accommodate the museum exhibition.
- The central location of the cafe to act as a 'common area' between the museum accommodation and the refurbished community hall.

## PREFERRED OPTION

### General Description

The layout of the scheme identified as best-fitting the brief is primarily a hybrid of Options C and D.

The scheme uses the side entrance with a glazed access to the centre of the building. This allows visitors to easily access either the Museum or the Community Hall.



Image : front entrance

The proposal utilises the main hall as a museum display area, with a mezzanine added to provide a large second floor. The stage is lowered to floor level and the mezzanine extended into the volume of the stage.

This provides additional display area within a windowless environment – ideal for a number of light sensitive displays.

Community use is retained in a number of ways.

- The gymnasium is refurbished as a Community Hall.
- The Lucas Room is retained as a meeting room.
- A local history studies centre will be established on the new mezzanine.
- A large education room will be established which will allow activities for school parties of all ages.
- Temporary exhibitions area, located on the stage, will accommodate differing types of local exhibits.

The Community Hall will have the suspended ceiling removed and the rooflight reinstated. The floor would be relaid with a spring timber floor and the walls clad to provide flush walls, removing the column projections, and allowing the introduction of acoustic dampening at high level. This would allow the hall to be used for a large range of community uses, from use by community groups to recreational activities.

The hall will have large doors opening into the adjoining cafe. This will allow refreshments to be served to functions within the community hall. The cafe will accommodate 40 covers, a viable number for such a business, allowing the cafe to be let as a franchise if desired. Access to

## Hitchin Town Hall – Museum Feasibility Study: Report to Cabinet

the cafe will be by the new entrance from the covered street access. This will allow direct access to the cafe from the main entrance.

Storage is provided by using the existing gym store. This is reinforced by the provision of full length storage at the far end of the hall and new access to stores directly from the hall. A small area for showers and changing is also provided.

Upon arrival within the building visitors are greeted at the shop. This point will provide orientation allowing visitors to branch off to differing areas of the building. At this point the main vertical circulation is provided by a new lift and stair creating access for all to every floor plate.

At the front of the building an area for gallery display is located in the existing entrance lobby. This will utilise the entrance as a large window into the central gallery area. Further engagement with the street is provided by the introduction of two new display cases in existing window positions.

New toilet provision will be created on the new entrance 'street'. This will be of adequate size to allow for the differing uses of the building, being sized to accommodate either school parties or events with a reception serving alcohol if required.

The first floor of the building will be brought together as one floor plate by the introduction of a glazed link, joining the new mezzanine of the Main Hall with the lift and stair core and education room, situated in the Workman's Hall (where the changing rooms are currently housed).

Another element at first floor level is the introduction of a roof garden and external terrace, over what is now the kitchen. This would allow the creation of a physic garden.



Image : mezzanine galley

The provision of a local history study centre is accommodated on the first floor mezzanine to the main hall. This, combined with the adjacent local history storage facilities provides better public access to this important element of the museum collection.

Another important element is the creation of a dedicated education room. This is situated within the workman's hall, directly below the staff accommodation, allowing access to the galleries via the glazed link or to the community hall below for other activities. This will allow a wide ranging educational programme to be developed.



Staff offices from the three sites of Letchworth and Hitchin Museums, as well as the Museums Service Store on Burymead Road will be amalgamated into the new provision at Hitchin Town Hall. This separates the activities of storage from curatorial offices and allows the team to be sited in a central location closer to the public. This is a bold and modern approach to museum management. There is a range of staff provision spread throughout the site, but the overarching aim of accommodating all staff on one site is achieved. Staff accommodation is as follows:

**Ground Floor**

Technicians workshop	22.3m <sup>2</sup>
Reception desk	

**First Floor**


Double office	23.6m <sup>2</sup>
Large double office	28.0m <sup>2</sup>

**Second Floor**

Large shared office	73.6m <sup>2</sup>
(for up to 6 staff and kitchenette)	

The proposed overall accommodation, compared with the established existing accommodation, is as follows:

<b>USE</b>	<b>Existing Area (m<sup>2</sup>)</b>	<b>Preferred Option Area (m<sup>2</sup>)</b>
<b>Retail</b>	32	123
<b>Exhibition / Gallery</b>	430	604
<b>Flexible Use</b>	128	51
<b>Community Use</b>	78	399
<b>Offices</b>	60	148
<b>Museum Storage</b>	60	158
<b>Toilets</b>	20	44
<b>Circulation</b>	n/a	287
<b>Roof Terrace &amp; Garden</b>	n/a	128
<b>TOTAL</b>	<b>808</b>	<b>1942</b>

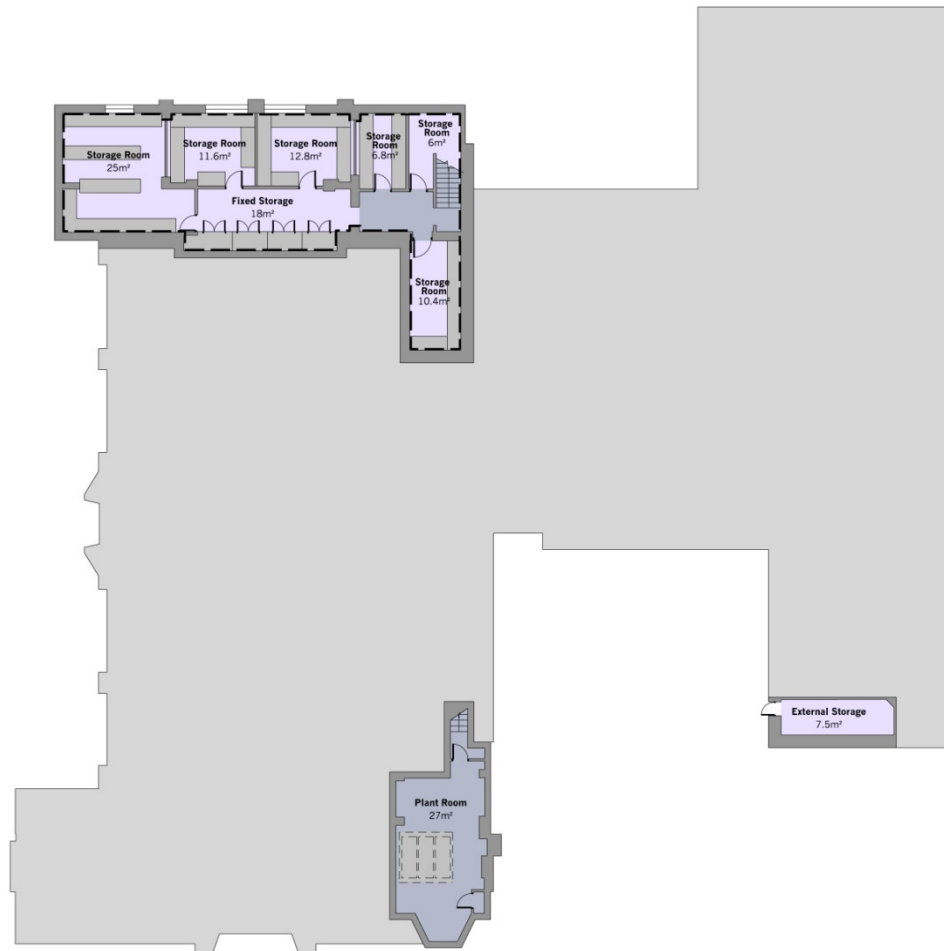

	Total Floor Areas
RETAIL	123m²
EXHIBITION / GALLERY	604m²
FLEXIBLE USE	51m²
COMMUNITY USE	399m²
OFFICES	148m²
MUSEUM STORAGE	158m²
TOILETS	44m²
CIRCULATION	287m²
ROOF TERRACE / GARDEN	128m²
	<b>1942m² TOTAL</b>

Community use retained:

- Lucas Room
- Stage Lowered
- Gymnasium used as Community Hall, Ancillary Storage & Showers.
- Local History Archive and Study Centre located on mezzanine

HITCHIN TOWN HALL  
PREFERRED OPTION  
BASEMENT PLAN  
1:200 @ A3



buttress fuller alsop williams - architects

31-33 Princess Street, Manchester, M2 4BF - telephone +44 (0)161 236 3303  
fax +44(0)161 236 3603 - web site: www.bfaw.co.uk - email: contact@bfaw.co.uk



buttress fuller alsop williams - architects



# Hitchin Town Hall – Museum Feasibility Study: Report to Cabinet



# Hitchin Town Hall – Museum Feasibility Study: Report to Cabinet



	Total Floor Areas
RETAIL	123m <sup>2</sup>
EXHIBITION / GALLERY	604m <sup>2</sup>
FLEXIBLE USE	51m <sup>2</sup>
COMMUNITY USE	399m <sup>2</sup>
OFFICES	148m <sup>2</sup>
MUSEUM STORAGE	158m <sup>2</sup>
TOILETS	44m <sup>2</sup>
CIRCULATION	287m <sup>2</sup>
ROOF TERRACE / GARDEN	128m <sup>2</sup>
	<b>1942m<sup>2</sup> TOTAL</b>

## Community use retained:

- Lucas Room
- Stage Lowered
- Gymnasium used as Community Hall, Ancillary Storage & Showers.
- Local History Archive and Study Centre located on mezzanine

**HITCHIN TOWN HALL  
PREFERRED OPTION  
FIRST FLOOR PLAN  
1:200 @ A3**




**buttress fuller alsop williams** · architects

31-33 Princess Street, Manchester, M2 4BF · telephone + 44 (0)161 236 3303  
fax + 44(0)161 236 3603 · web site: www.bfaw.co.uk · email: contact@bfaw.co.uk



**buttress fuller alsop williams** · architects



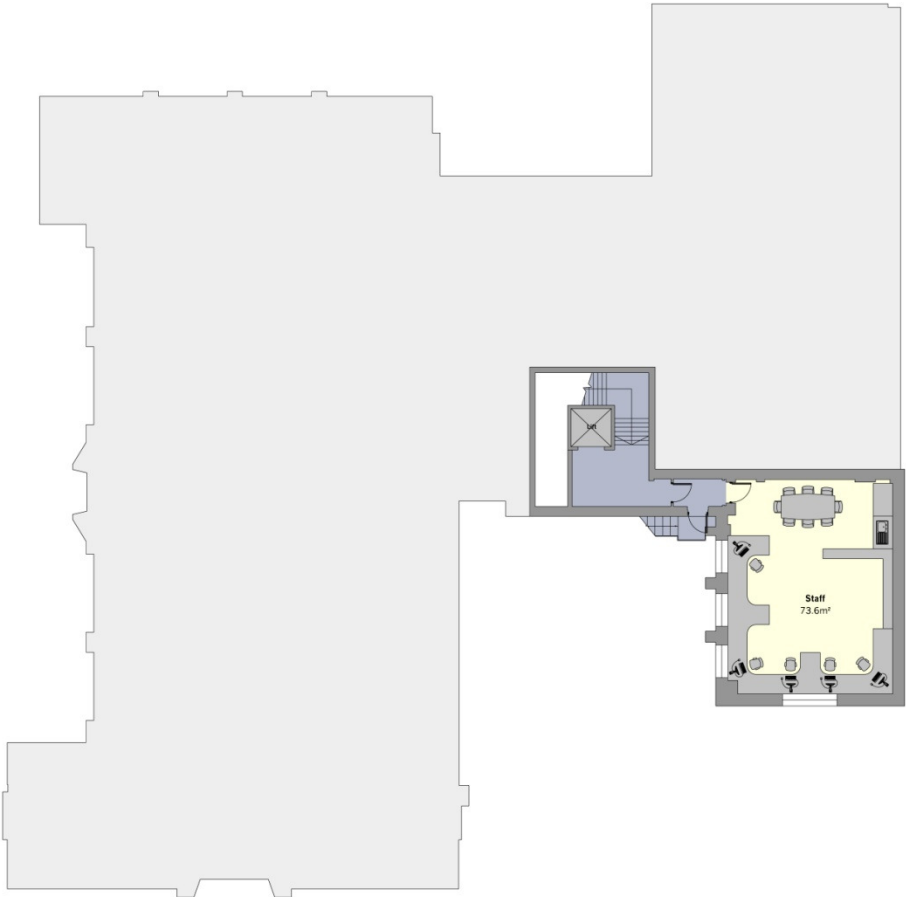

	Total Floor Areas
RETAIL	123m <sup>2</sup>
EXHIBITION / GALLERY	604m <sup>2</sup>
FLEXIBLE USE	51m <sup>2</sup>
COMMUNITY USE	399m <sup>2</sup>
OFFICES	148m <sup>2</sup>
MUSEUM STORAGE	158m <sup>2</sup>
TOILETS	44m <sup>2</sup>
CIRCULATION	287m <sup>2</sup>
ROOF TERRACE / GARDEN	128m <sup>2</sup>
	1942m <sup>2</sup> TOTAL

- Community use retained:
- Lucas Room
  - Stage Lowered
  - Gymnasium used as Community Hall, Ancillary Storage & Showers.
  - Local History Archive and Study Centre located on mezzanine

HITCHIN TOWN HALL  
PREFERRED OPTION  
SECOND FLOOR PLAN  
1:200 @ A3

## **Structural Interventions**

### **Design Philosophy**

The structural works have been designed wherever possible to cause minimum intervention to the existing buildings. With the exception of the new stairwell and re-roofing to form the roof garden the works would be reversible in that the new structure could be removed and the original structure be reinstated.

The support to the new structure has been designed to cause minimum damage to the building which may, at times, not result in the most obvious structural arrangement.

### **Main Hall**

#### **Ground Floor**

The existing sprung timber floor will be carefully taken up with the timber being stored for re-use. The current method of support of the floor will be studied and recorded during the dismantling operation.

After completion of the mezzanine structure the timber floor will be re-laid (not sprung) using original timber planks with the necessary support structure introduced beneath.

#### **Mezzanine Floor**

The mezzanine will be formed using a steel frame with a composite concrete floor. The existing balcony columns will be replaced and a total of eleven new circular columns will be positioned within the hall area to support the new floor. Around the perimeter of the hall steel members will be fixed to the masonry such that, whilst holes will have been drilled and a few padstones may have been inserted, there will not

have been significant removal of any of the existing masonry. Two further columns may be required, tucked into corners of the existing detailing in order to complete the support for the floor.

The new columns will be supported on concrete pad foundations (providing the ground conditions are found to be satisfactory)

### **Existing Balcony**

The existing timber balcony at the rear of the hall is of a sloping construction such that reconfiguration of this to provide a level floor at the required level would not be a viable structural option. It will therefore be taken down in its entirety.

### **Stage Area**

The existing stage, which is higher than the floor of the main hall, will be taken up and replaced with a new floor at the same level as the main hall. The new floor will be steel framed with a composite concrete deck. Two new columns will be required but the remainder will be supported on steel beams either built into, or bolted to, the masonry walls.

### **Walkway and Glazed Corridor**

The new walkway that will link the Community Hall with the Mezzanine area will be steel framed with glass walls. The structure, of tubular steel sections will be fully visible in the walls. The deck of the walkway will be of a composite concrete construction.

The walkway will span from the wall of the existing stairwell across to the wall of the hall and will enter by the existing window opening. This arrangement, incorporating short ramps within the link, will avoid the necessity to provide any additional supports puncturing the building.



The use of the window opening will mean that little work will be required to provide access into the hall building.

At present the capacity of the hall wall has not been determined to confirm its adequacy to support the end of the walkway. Appropriate investigations will be undertaken as the scheme progresses. At that time a decision would be made to determine whether the masonry is adequate, requires strengthening or whether new columns may be needed to be introduced. The determining factor will be to cause minimum reversible alteration to the existing building.

The glazed wall of the proposed corridor will be supported on steel beams introduced at high level within the toilets (where walls are being removed). The beams will be supported on piers of the existing masonry that will be left in position. The lower level pitched slate roof will remain in place and also be supported on the new beams.

### **Stairwell and Lift Shaft**

The stairwell, up to first floor level, will be of 225mm masonry and will provide support for the link corridor and new roof garden beams.

The lift shaft will also be formed using 225mm masonry. It will incorporate a pit, excavated into the ground, to the depth required (probably 1.4m) for the selected lift. The base of the pit will be formed using a 200mm concrete slab. The lift shaft will extend approximately 4m above the third floor landing and will incorporate a lifting beam for maintenance of the lift.

### **Roof Garden**

The roof garden will be formed above the existing kitchen and bar areas. This will be area of greatest structural intervention. The existing roof will be stripped off and the rear wall of the kitchen may be rebuilt – the necessity for this will be determined when intrusive investigations are undertaken to prove the construction and foundations of the existing wall. The wall between the bar and the kitchen may need to be strengthened and underpinned, again this will be determined by intrusive investigations.

A new pre-cast concrete roof will be constructed over this area with sufficient capacity to carry a roof garden (the Physic Garden) and seating area. In order to minimise intrusion into the main hall building, steel beams will be introduced such that the pre-cast units span parallel to the wall of the hall.



## **Services requirements**

### **Electrical Services**

Given the proposed level of intervention and the apparent age and condition of the existing electrical services installations it is proposed that the building will be completely rewired and if deemed necessary provided with a new upgraded incoming electricity supply to accommodate possible additional loads associated with the proposed use.

### **Life Safety Systems**

Life protection systems will be provided in the form of automatic fire alarm and detection systems to provide earliest possible warning and alarm of a fire situation and emergency lighting systems to aid safe evacuation in the event of power outages within the building.

### **Building Security Systems**

Passive building security measures will be enhanced with active security systems in the form of automatic intruder detection provided throughout the building linked to a remote monitoring station plus closed circuit television system (CCTV) provided to monitor selected points of entry, circulation and gallery spaces. Panic alarms will be provided to be considered as part of staff protection and security measures.

### **Internal Lighting Installation.**

The building will be provided with a complete new artificial lighting installation utilising low energy, high frequency luminaires best suited and selected to compliment the form, decor and use of each space.

Energy saving will be promoted through the use of presence detection control and daylight linking to reduce light levels internally when daylighting sufficiently illuminates selected internal spaces. New low energy lamp technologies such as LED's will be considered for use as part of the lighting design strategy.

### **External Lighting Installation**

The building will be provided with external lighting installations to permit safe entry and egress whilst enhancing the Architectural features of the building and promoting its prominence and use.

### **Small Power & Data Installations**

The building will be provided with a new small power and data installation designed to adequately accommodate the mixed use proposals and provide the latest data connectivity solutions.

### **Passenger Lift**

A machine room-less traction passenger lift will be installed to provide vertical transportation to all upper floor levels (excluding the basement) the lift will be in full compliance with part M of the building regulations.



## **Mechanical systems**

### **Heating and cooling**

Generally heating will be via high efficiency condensing boiler feeding perimeter radiators throughout. All radiators will have thermostatic control. The ground floor gallery areas have high efficiency air sourced heat pumps providing heating and cooling to off -set high heat gains.

### **Ventilation**

An air handling unit will serve the café and kitchen area with filtered fresh air, with extract air being from the kitchen canopy. The ground floor gallery will have a dedicated supply air handling unit supplying heated only fresh air to suit the occupancy profiles of the space. The design intention is to develop natural ventilation strategies throughout to minimise energy consumption whilst ensuring ventilation and avoid excessive overheating. This will be via perimeter openings at low level with high level openings on the floor above, intended to be within the roof in the public spaces. These will also be used for natural daylight. The system will be automated based on control of temperature and CO2. Perimeter offices / cellular spaces will have manual opening windows.

Where ventilation cannot be achieved via passive means local heat recovery ventilation units will be provided.

The community hall area will have a series of roof mounted roof lights that will also provide natural daylight. These again will be controlled on the same function.

Local toilet extract systems will be provided.

### **Domestic cold services**

A new Boosted cold water system will be provided to all outlets from a cold water storage tank. This will ensure a guaranteed pressure at all outlets.

### **Domestic hot water services**

A new gas fired hot water system will be provided. A system for the kitchen area and then a separate system from the wash hand basins and other such outlets. This will ensure only the required amount of hot water is provided as required as the peak demand could be low. Further clarification of the function of the food preparation in the kitchen would confirm.

### **Gas**

Gas piped services will be amend and re-distributed to suit the new kitchen and the new boiler and hot water heater.

### **Disposal soil and waste**

A new soil and waste system will be provided, all above ground. The below ground connections required will be by others. It is assumed any grease filtration / traps will be by a specialist via the kitchen end user. New sanitaryware is within the M&E cost plan however deemed to be specified to the architects requirements.

### **Controls**

There will be a new building management control system provided for effective operation of the mechanical services.



## Health and safety implications

There are a number of Health and Safety implications regarding the redevelopment of the Town Hall site. The significant risks have been identified as follows:

1. The replacement of services will require removal of asbestos.
2. The introduction of significant structures within the existing building will require working in confined spaces.
3. The limited external space reduces the available space for compounds and site accommodation.
4. The introduction of a lift within the existing building is a particular risk which requires careful selection as part of the design process.
5. High level services and glazing requires consideration at the design stage.

As part of the feasibility study, we as appointed CDM Coordinator were asked to advise the Client as to the degree of significant risk inherent within such submission regarding health, safety and welfare during construction, use and maintenance of those proposals put forward for consideration. In facilitating this appointment we reviewed all existing information with relevant design disciplines and developed a hazard/risk register that highlighted all residual risks that were made apparent following design team meetings and design reviews that would need to be addressed at later stages.

On review of the proposed design option, general issues regarding site access/egress, material delivery, storage of materials and traffic management have potential construction phase implications due to the location and space restrictions posed on site and the surrounding area.

Existing risks may be apparent as the building pre dates 1999 asbestos prohibition. As with all major refurbishment work, a 'Type three' asbestos survey will be able to determine the extent of asbestos containing materials (ACMs) and provide a more detailed assessment as to the course of action in which to take.

On site risks during construction phase at this initial stage have been identified through review of information and drawings at meetings. It is envisaged that demolition and stripping of existing structures and installations will need to be considered as to mitigate risks arising out of such tasks. Also, structural beams designed in such a way that placing in situ has no handling risks associated.

All buildings are required to be designed in such a way that ensures they are safe and without risk during use and maintenance. The design has taken into consideration these measures by designing in methods for maintenance in which a person can access safely, such as high level roof lights. This shall assist in future use when the client takes control of the finished design.

The client is to be advised that these are initial findings based on initial information provided at this stage and that as the project develops, new significant hazards/risks may change or become apparent and will need to be managed and controlled as they arise by those undertaking the works.

The significant risks which have been identified are listed in the Hazard Risk Register which is attached in the appendix.



## Cost plan

1	Construction Cost (as cost report)		2,220,602
2	Inflation / Deflation (to 2Q 2011)	-1.40%	-31,088
3	Anticipated Construction Cost		2,189,513
3	Fees and Surveys	10.00%	218,951
<b>Construction Sub-total</b>			<b>2,408,465</b>
4	Exhibition Fit-Out (inc. Fees)		983,373
5	General Fit-Out		50,000
<b>Fit-Out Sub-total</b>			<b>1,033,373</b>
<b>Total Cost (Excl VAT)</b>			<b>3,441,838</b>

Further details of the costs shown here are illustrated in the cost report in the appendix. This is based on the input of the whole design team and has separate elements for the services and exhibition fitout in addition to the construction costs.

## Funding

Whilst the overall costs are beyond the existing budget allocated, it should be noted that there are a number of differing funding opportunities which may be appropriate. This is particularly relevant when considering the financing of the fitout element of the works - due to the timescales involved - which would allow for applications for funding to be sought for this element. Sources of funding for this work could include the Heritage Lottery Fund. The next step, if this project is to proceed, is to enter into discussions with the Heritage Lottery Fund about the best way to make an application. Whilst there is a lot of media coverage regarding the reduced funding by the HLF, with money diverted to the Olympics, it should be noted that a scheme of this size falls within their current funding criterion.





## THE WAY FORWARD

### Milestones to successful project delivery

The delivery of this project in a timely manner is reliant on key dates being achieved. In order for a new museum to open to the public by the April of 2012, the following date must be met:

December 2009	Decision to proceed
February 2010	Appointment of Design Team (assumed council procurement rules will not require an OJEU route)
May 2010	Design development and Planning permission application (RIBA stage D)
August 2010	Working drawings completed
September 2010	Tender documents produced
October 2010	OJEU notice for main contract works
November 2010	Evaluation of expressions of interest
December 2010	Tender main contract
January 2011	Start on site – main contract works
November 2011	Exhibition fitout – start
January 2012	Completion – main contract works
February 2011	Exhibition fitout completed
March 2012	Final fit-out and object install
April 2012	Public opening

## Hitchin Town Hall – Museum Feasibility Study: Report to Cabinet

In order to achieve the above programme there are a number of key decisions that need to be made. The appointment of an exhibition design team needs to be made concurrently with the appointment of the building refurbishment team. This is to allow the museum exhibition design to be sufficiently developed and detailed to allow for an integrated design approach.

In addition, the procurement route for the appointment of both contractors and professional consultants needs to be fully established to ensure the correct processes are followed this is dependent on whether the works will reach differing procurement thresholds at the time of their implementation.

## CONCLUSIONS

The Town Hall building is a good size and location to allow a museum to be developed on the site. The building is generally sound in condition and able to be adapted for this use.

The report identifies an appropriate spatial arrangement, which will create an exciting new museum facility, whilst consolidating existing provision into one venue. This scheme also maintains a valued community provision as part of the scheme.

This shows that the overall concept of a museum on the Hitchin Town Hall site is both physically and economically feasible.

## Appendices

### Cost Report




HITCHIN TOWN HALL

FEASIBILITY  
COST ESTIMATE  
NR.1

October 2009

**HITCHIN TOWN HALL**  
**FEASIBILITY COST REPORT NR.1**

**C O N T E N T S**

- 1.00 INTRODUCTION
- 2.00 INFORMATION & ASSUMPTIONS
- 3.00 EXCLUSIONS
- 4.00 FLOOR AREAS
- 5.00 COSTS

## 1.00 INTRODUCTION

- .01 Appleyard & Trew LLP (A&T) were commissioned to provide high level cost advice on design proposals prepared by Buttress Fuller Alsop Williams (BFAW).
- .02 The scheme involves the alteration and refurbishment of the existing Hitchin Town Hall to change use and become a Museum.
- .03 Feasibility costs are provided for the preferred option and for the purpose of this report it has been assumed that construction works would commence in November 2010 with a construction period of 52 weeks.
- .04 The estimated 'out-turn cost' (excl VAT) is £3,441,838 and the estimated 'construction cost' (excl VAT) is £2,220,602. A breakdown of these figures is included in this report.

## 2.00 INFORMATION & ASSUMPTIONS

- .01 The budget costs are based upon the following information:-
  - a) BFAW drawings:
    - Existing Basement Plan
    - Existing Ground Floor Plan
    - Existing First Floor Plan
    - Existing Second Floor Plan
    - Proposed Basement Plan
    - Proposed Ground Floor Plan
    - Proposed First Floor Plan
    - Proposed Second Floor Plan
  - b) Thomasons drawings:
    - SK01 - New Walkway Structure
    - SK02 - Stage infill Structure
    - SK03 - Mezzanine Structure
    - SK04 - Roof Terrace Structure
  - c) Silcock Leedham LLP:
    - Engineering Services Budget Costs
  - d) RFA Design
    - Exhibition Fit-Out Budget Costs
- .02 Construction costs are based on approximate quantities utilising current rates.
- .03 It is assumed that competitive tenders will be obtained for the proposed construction works using standard contract conditions and a single stage traditional procurement route, for the Client to take advantage of the current favourable market conditions.
- .04 Inflation/deflation has been applied to current costs up to the mid-point of the anticipated construction period, i.e. 2Q 2011; based on the BCIS 'all-in Tender Price Indices'
- .05 Within the 'out-turn' costs Professional Fees have been applied at 10% and within the 'construction' costs a Contingency has been applied at 7.5%.
- .06 Allowances totalling £50,000 have been included for General Fit-out (refer to breakdown). This budget will be subject to Client Requirements.

**2.00 INFORMATION & ASSUMPTIONS (CONTD)**

.07 Risks - in our view the following risks exist with regard to the cost of this project:

- Influence on scheme due to planning issues/requirements
- Influence on scheme due to Client/End User/Stakeholders
- Asbestos removal

**3.00 EXCLUSIONS**

.01 Allowances have been made within the overall 'out-turn' costs for items outside the construction costs however the following items are excluded

- a) Value Added Tax
- b) Asbestos removal
- c) Legal Fees
- d) Kitchen/Café Fittings
- e) Community Use Furniture
- f) Loose Furniture & Fittings
- g) Decanting Costs
- h) Conservation of Collections Costs

**4.00 FLOOR AREAS**

.01 The proposed floor plans would provide the following areas:

• Retail	146 m <sup>2</sup>
• Exhibition/Gallery	577 m <sup>2</sup>
• Flexible Use	51 m <sup>2</sup>
• Community Use	395 m <sup>2</sup>
• Offices	148 m <sup>2</sup>
• Storage	147 m <sup>2</sup>
• Toilets	44 m <sup>2</sup>
• Circulation	306 m <sup>2</sup>
• Roof Terrace/Garden	128 m <sup>2</sup>

---

1942 m<sup>2</sup>

---

**5.00 COSTS**

.01 Total Out-turn Costs (refer to breakdown)

.02 Construction Costs (refer to breakdown)

.03 Mechanical & Electrical Engineering Services Costs (refer to breakdown)

.04 Exhibition Fit-Out Costs (refer to breakdown)

.05 General Fit-Out Costs (refer to breakdown)

**Appleyard & Trew LLP**

6 October 2009

### Hitchin Town Hall - Preferred Option

#### 5.01 Total Out-Turn Cost Summary

1 Construction Cost		2,220,602
2 Inflation/Deflation (to 2Q 2011)	-1.40%	-31,088
		<hr/>
Sub-total		2,189,513
3 Fees and Surveys	10.00%	218,951
		<hr/>
Sub-total	£	2,408,465
		<hr/>
4 Exhibition Fit-Out		983,373
5 General Fit-Out		50,000
		<hr/>
Sub-total	£	1,033,373
		<hr/>
Total Out-Turn Cost (Excl VAT)	£	3,441,838
		<hr/> <hr/>

Refer to information, assumptions and exclusions contained within the  
Feasibility Cost Report



## **Hitchin Town Hall - Preferred Option**

### **5.02 Construction Cost Summary**

1 Demolitions / Alterations	122,800
2 Substructure	22,300
3 Steelwork	29,480
4 Upper Floors	36,150
5 Roof	127,000
6 Stairs	51,500
7 External Walls	37,800
8 Windows & External Doors	47,900
9 Internal Walls & Partitions	11,225
10 Internal Doors & Screens	30,950
11 Wall Finishes	22,780
12 Floor Finishes	75,690
13 Ceiling Finishes	45,175
14 Decorations	40,896
15 Fittings	0
16 Sanitary Fittings	11,250
17 M&E Engineering Services (refer to Silcock Leedham breakdown)	733,764
18 BWIC with Services	29,351
19 Drainage	10,000
20 External Works	15,300
21 Repairs etc	<u>208,000</u>
Sub-total	£ 1,709,311
22 Preliminaries:	
General	208,000
Scaffolding	<u>50,000</u>
Sub-total	£ 1,967,311
23 Contingency @ 7.5%	<u>147,548</u>
Sub-total	£ 2,114,859
24 Main Contractor's O/H&P @ 5%	<u>105,743</u>
<b>Total Construction Cost (Excl VAT)</b>	<b>£ 2,220,602</b>

Refer to information, assumptions and exclusions contained within the  
Feasibility Cost Report

HITCHIN TOWN HALL			
	£/m2 GFA	Gross Floor Area (Estimated)	Budget Cost
<b>REMOVAL OF REDUNDANT SERVICES NEW INCOMING STAT SERVICES</b>			
<b>Decommissioning and Removal of Redundant Heating Services</b> Isolation disconnection and removal for scrap existing redundant services including boiler plant and associated distribution pipework valves and radiators throughout.	£5.00	1942	£9,710.00
<b>Decommissioning and Removal of Redundant Water Services</b> Isolation disconnection and removal for scrap existing redundant services including water heaters, storage tanks, distribution pipework, valves throughout.	£5.00	1942	£9,710.00
<b>Decommissioning and Removal of Redundant Electrical Services</b> Isolation disconnection and removal for scrap existing redundant services including containment, cabling, accessories, luminaires and switchgear.		1942	£6,200.00
<b>New Incoming Metered Mains Cold Water Supply</b> None allowed, assumed adequate - Load analysis check needed		1942	£0.00
<b>New Incoming Metered Gas Supply</b> None allowed, assumed adequate - Load analysis check needed		1942	£0.00
<b>New Incoming Metered Electricity Supply</b> excluded		1942	£0.00
<b>Enabling Works Total</b>	<b>£13.19</b>	<b>1942</b>	<b>£25,620.00</b>
<b>PUBLIC HEALTH INSTALLATION</b>			
<b>Sanitary Fittings</b> WC suites, wash basins, cleaner's sinks, disabled toilet facilities	£8.00	1942	£15,536.00
<b>Disposal - Soil, Waste and Ventilation</b> Soil Waste and Vent System, Above Ground Pipework PVCu and Cast Iron.	£15.00	1942	£29,130.00
<b>Disposal - Rainwater</b> Assumed Costs Included as part of the main contract	£0.00	1942	£0.00
<b>Water Services</b> Hot And Cold Water Services, Mains Fed, Gas Fired Water Heater, Pipework, Insulation etc.	£15.00	1942	£29,130.00
<b>Public Health Total</b>	<b>£42.19</b>	<b>1748.99</b>	<b>£73,796.00</b>

<b>MECHANICAL SERVICES INSTALLATION</b>			
<b>Heat Source</b> Central LPHW Gas fired condensing boiler plant with controls, stainless steel flue to atmosphere, run and standby variable temperature heating pumps, plant room pipework, insulation, valves, fittings and pressurisation unit.	£25.00	1942	£48,550.00
<b>Gas Supply</b> Gas distribution internally including pipework, fittings, valves etc.	£8.00	1942	£15,536.00
<b>LTHW Installation</b> Pipework distribution external from plant rooms including risers, radiators, thermal insulation etc.	£36.50	1942	£70,883.00
<b>Cooling Installation</b> Comfort cooling to Ground Floor Gallery, history archive and chemist display	£16.00	1942	£31,072.00
<b>Ventilation - Mechanical Supply and Extract</b> Local Supply and extract Heat Recovery Units, ductwork, fittings, attenuators, insulation, dampers, grilles and diffusers.	£10.00	1942	£19,420.00
<b>Ventilation - Natural assist</b> Local actuated louvred openings, ad-hoc actuators and windcatcher style turrets (BWIC exc)	£20.00	1942	£38,840.00
<b>Ventilation - Local Extract Plant</b> Local extract plant including, attenuators, ductwork, fittings, dampers, grilles and louvres etc.	£5.00	1942	£9,710.00
<b>Toilet Ventilation</b> Extract plant, ductwork, grilles and attenuation	£8.50	1942	£16,507.00
<b>Testing and Commissioning</b> Testing and commissioning of mechanical and public health installation services including operating and maintenance manuals and record drawings	£5.00	1942	£9,710.00
<b>Dry Riser</b> Riser including landing valve and inlet box (sprinkler installation not required)	N/R	1942	£0.00
<b>Building Energy Management System</b> Centralised energy management system comprising motor control centres, isolators, starters and all controls, outstations, riser network and monitoring, including head-end equipment and control wiring.	£15.00	1942	£29,130.00
<b>Mechanical Services Total</b>	<b>£149.00</b>	<b>1942</b>	<b>£289,358.00</b>

<b>ELECTRICAL SERVICES INSTALLATION</b>			
<b>Sub Main Distribution</b> New internal sub main cabling from switch panel, new sub distribution boards throughout.	£12.50	1942	£24,275.00
<b>Containment System</b> New containment throughout, included sub main cable tray, final distribution cable basket, 3 compartment screened cable trunking.	£14.50	1942	£28,159.00
<b>General Lighting</b> New general lighting throughout, including circulation and office spaces, based on high frequency control, suspended luminaires, LG7 compliant environment, Decorative luminaires and cabling. Excluding specialist exhibition lighting.	£55.00	1942	£106,810.00
<b>Emergency Lighting</b> New addressable emergency lighting system throughout, including luminaires and cabling.	£7.75	1942	£15,050.50
<b>External Lighting</b> New building mounted external lighting for safe entry and egress,	£6.75	1942	£13,108.50
<b>Small Power</b> Power outlets provision to all areas, based on 2No 13A double socket outlet per workstation in IT areas.	£20.00	1942	£38,840.00
<b>General Power Supply</b> Dedicated sub main power supplies to lift, HVAC plant and other ancillary services.	£2.50	1942	£4,855.00
<b>I.T. Installation</b> CAT6 Horizontal data cabling from Patch Cabinet to Workstation, based on 2No RJ45 outlets per workstation, including accessory back boxes provision, excluding termination either end, testing and the provision of Patch Cabinets.	£11.00	1452	£15,972.00
<b>CCTV System</b> Minimum level of CCTV coverage to points of entry and gallery spaces. (8.No. Cameras)	£5.55	1452	£8,058.60
<b>Fire Alarm</b> New addressable fire alarm and smoke detection system, based on category P1/L1 coverage throughout, including electronic sounders, manual call points and point detection, soft skin cabling throughout, standalone system.	£15.50	1942	£30,101.00
<b>Intruder Alarm System</b> Intruder detection system through ground floor areas, and coverage to escape staircases, based on dual technology detection, central control panel, entrance keypad facility, external alarm, redcare autodialer, and cabling.	£4.75	1942	£9,224.50
<b>Access Control System</b> Access control to ground floor entrance doors(4No.), including maglocks, power supplies, door release equipment and cabling, standalone system.	£3.00	1942	£5,826.00
<b>Lightning Protection</b> New lightning protection system based on external copper tape air termination network, down conductors and earth pits.	£2.25	1942	£4,369.50
<b>Earthing and Bonding</b> Equipotential and supplementary bonding throughout.	£1.25	1942	£2,427.50
<b>Testing and Commissioning</b> Testing and commissioning of Electrical Services	£1.50	1942	£2,913.00
<b>Electrical Services Total</b>	<b>£159.62</b>	<b>1942</b>	<b>£309,990.10</b>
<b>Sub-Total Engineering Services Installation</b>	<b>£364.01</b>	<b>1942</b>	<b>£698,764.10</b>
<b>Lift</b> Basic passenger lift (machine in shaft)	N/R	1942	£35,000.00
<b>Lifts and Escalators Installation</b>	<b>£18.02</b>	<b>1942</b>	<b>£35,000.00</b>
<b>Total Engineering Services Installation</b>	<b>£382.03</b>	<b>1942</b>	<b>£733,764.10</b>

<b>EXCLUSIONS</b>			
Inflation beyond first quarter 2010			
External Works including statutory authority sub station or upgrades to local distribution network			
Construction managers fees, site establishment and attendances			
Professional and prescribed fees			
Contingencies and design reserve			
Below slab drainage			
Specialist air treatment, power and fire suppression installations to computer rooms etc			
I.T. Hardware and Software			
Uninterruptible Power Installations and associated generator interfaces and control wiring			
Hand dryers, drinking fountains, macerators			
Hand held fire-fighting equipment			
Tax allowances			
Value Added Tax			
Builders work In Connection			
Asbestos Removal			
Rainwater Pipework and Guttering			
Contract Preliminaries			
Audio/Visual Equipment and Installation			
Sub-metering of mechanical and electrical services to lettable spaces			
All works associated with electronic check out system			
Wireless Data Network			

**Exhibition Fit-out Capital Cost Estimates (provisional)**

Description	Component breakdown	Est. cost (£)	Totals (£)
<b>GROUND FLOOR:</b>			
<b>MAIN DISPLAY AREA</b>			
<b>(280.5 sqm @ £1,350 psm)</b>			
	42 metres wall display cases @ 2.5K per metre	105,000	
	11 metres free-standing cases @ 3.5K pm	38,500	
	4 metres f/s full-height display cases @ 4K pm	16,000	
	11 metres desk display cases @ £2K per metre	22,000	
	1 NR 1500mm circular display case @ £8,500	8,500	
	Glazed display drawers (in case plinths)	7,500	
	Theatrical reconstructions + model-making	32,500	
	6 NR interactive displays @ 7.5k	45,000	
	Audio-visual + computer displays: equipment	25,000	
	Audio-visual + computer displays: programmes	25,000	
	Interpretive graphics	8,500	
	Signage + site orientation graphics	5,500	
	Exhibit mounting	7,175	
	Display lighting	30,000	
	Seating	2,500	
			378,675
<b>GROUND FLOOR:</b>			
<b>PICTURE GALLERY</b>			
<b>(71.2 sqm @ £550 psm)</b>			
	7 metres high-spec desk display cases @ 2.5K	17,500	
	Demountable + flexible panel display system	11,500	
	Interpretive graphics	1,660	
	Display lighting	7,500	
	Seating	1,000	
			39,160
<b>GROUND FLOOR:</b>			
<b>TEMPORARY EXHIBITIONS</b>			
<b>(50.9 sqm @ £750 psm)</b>			
	4 NR demountable display cases @ 3.5K	14,000	
	Demountable + flexible panel display system	14,000	
	Interpretive graphics	1,675	
	Display lighting	7,500	
	Seating	1,000	
			38,175
<b>FIRST FLOOR</b>			
<b>GALLERIES</b>			
<b>(250.5 sqm @ £1,350 psm)</b>			
	15 metres wall display cases @ 2.5K per metre	37,500	
	20 metres free-standing cases @ 3.5K pm	70,000	
	10 metres desk display cases @ £2K per metre	20,000	
	1 NR 2000mm sq display case @ £7,000	7,000	
	Glazed display drawers (in case plinths)	5,000	
	24 metres angled balustrade displays @ 0.5K	12,000	
	Theatrical reconstructions (Chemist's Shop)	25,000	
	Model-making	19,675	
	6 NR interactive displays @ 7.5k	45,000	
	Audio-visual + computer displays: equipment	20,000	
	Audio-visual + computer displays: programmes	20,000	
	Interpretive graphics	8,500	
	Signage + site orientation graphics	5,500	
	Exhibit mounting	5,500	

Display lighting	35,000	
Seating	2,500	338,175
	<b>SUB-TOTAL</b>	<b>794,185</b>
Design fee @ approx.12.5% (including graphics)		99,373
Contingency @ approx. 10%		90,000
	<b>TOTAL</b>	<b>983,558</b>

**Hitchin Town Hall - Preferred Option**

**5.05 General Fit-Out Costs**

Shop Fittings / Reception Desk	25,000.00
Storage Shelving / Cupboards	15,000.00
Kitchen / Café Fit-Out	excl
Community Use Furniture	excl
Office Furniture	<u>10,000.00</u>
<b>Total General Fit-Out Costs</b>	<b>£ 50,000.00</b>



Risk register

## HAZARD AND RISK REGISTER



butressfulleralsopwilliams · architects

<b>PROJECT</b>	HITCHIN TOWN HALL			<b>PROJECT NO</b>	7037
<b>CLIENT</b>	NORTH HERTFORDSHIRE DISTRICT COUNCIL			<b>ISSUE DATE</b>	18-Sep-09
<b>DESIGN TEAM</b>	Architect:	Butress Fuller Alsop Williams	CDM-Coordinator:	Butress Fuller Alsop Williams	
	Structural Engineer:	Thomasons	Landscape Architect:	none	
	M+E Engineer:	Silcock Leedham	Acoustic Engineer:	none	
	Quantity Surveyor:	Appleyard and Trew	Other:	none	

Ref no	Date	Feature, element, structure, process or activity	Hazards or hazardous activity identified	Measures taken to reduce or eliminate hazards by Designers	Residual issues, hazards or risks	Control measures required	Method of communication of residual risks	Action by	Date closed out
<b>General / Existing conditions</b>									
<b>Construction</b>									
	22-Sep-09	Existing asbestos in building	Disturbance of asbestos	Type 3 asbestos survey to be carried out prior to refurbishment	Unknown (dependant on survey results)	Controlled removal of all identified asbestos as part of refurbishment works	Survey report and asbestos register	NHDC	
	22-Sep-09	Existing Lead Paints	Inhalation of lead paint residues	Careful redecoration of all potentially contaminated surfaces	Lead paints would still remain in situ	Method statements for surface preparation required	Hazzard risk register incorporated into feasibility report	NC	22-Sep-09
	22-Sep-09	Limited External Space	Limited external compound area	consideration of good construction access as part of design development	Limited external compound area	Good onsite co-ordination of materials and waste	Hazzard risk register incorporated into feasibility report	NC	22-Sep-09
<b>Use</b>									
	22-Sep-09	Entrance Location	Reduced pavement formed by introduction of ramped access	Entrance moved	Busy road	None	Hazzard risk register incorporated into feasibility report	NC	22-Sep-09
	22-Sep-09	Complex fire strategy	Fire risk	Improved zoning of building and integrated fire detection sysytem	Reduced fire risk	Robust Fire Risk Assessment	Hazzard risk register incorporated into feasibility report	NC	22-Sep-09
<b>Maintenance</b>									
	22-Sep-09	High level windows	poor maintenance & cleening access	Insertion of mezzanine - better access internally	High level windows retained	Method statement for maintenance required	Hazzard risk register incorporated into feasibility report	NC	22-Sep-09
	22-Sep-09	Poor drains to site	Blockages and poor sanitary conditions.	identification of issue	Poor drains to site	detaild drainage survey and appropriate design	Hazzard risk register incorporated into feasibility report	NC	22-Sep-09
<b>Architectural Issues</b>									
<b>Construction</b>									

## IMS 16 Hazard and Risk Register

Registered Office: 31-33 Princess St, Manchester M2 4BF : telephone +44 (0)161 236 3303 : fax +44 (0)161 236 3603 : e manchester@bfaw.co.uk  
 Liverpool Office: Stanley Hall, Edmund St, Liverpool L3 9NG : telephone +44 (0)151 236 3303 : fax +44 (0)151 236 3603 : e liverpool@bfaw.co.uk  
 Butress Fuller Alsop Williams is a trading name of Butress Fuller Alsop Williams Limited Registered in England and Wales No. 5363573 : www.bfaw.co.uk


Ref no	Date	Feature, element, structure, process or activity	Hazards or hazardous activity identified	Measures taken to reduce or eliminate hazards by Designers	Residual issues, hazards or risks	Control measures required	Method of communication of residual risks	Action by	Date closed out
	22-Sep-09	Tanking of basement	Possibility of undermining foundations	Trial holes to be undertaken to establish foundation construction & appropriate tanking detailing.	Work within confined area	Adequate methods of work	Hazzard risk register incorporated into feasibility report	NC	22-Sep-09
<b>Use</b>									
	22-Sep-09	Bin Location	Bins moved close to new cafe - adjacent to parking / loading with limited pavement.	Fenced and gated bin store	none	none	n/a	NC	22-Sep-09
	22-Sep-09	Shared use of new entrance passage	security / fire escape / waste disposal issues	early identification of issues	security / fire escape / waste disposal issues	Detailed understanding of use by all concerned.	Hazzard risk register incorporated into feasibility report	NC	22-Sep-09
<b>Maintenance</b>									
	30-Sep-09	none							
<b>Structural Issues</b>									
<b>Construction</b>									
	22-Sep-09	Structural Insertions	large insertions	safe methods of construction discussed	issues remain - although reduced	method statements & details required for all insertions	Further detils in scheme design & Identification in TSHSP	JH	25/09/2009
	29-Sep-09	Link corridor	Pre-constructed unit to be craned into position from rear of building	Structure will have designed lifting points	None providing contractor is competent for this type of erection.	Detailed method statement required.	Risk assessment will be included on structural drawings	JH	29/09/2009
	29-Sep-09	Roof garden	Lifting in pre-cast concrete units	Unit widths not to exceed 1.2m to assist handling	None providing contractor is competent for this type of erection.	Detailed method statement required.	Risk assessment will be included on structural drawings	JH	29/09/2009
	29-Sep-09	Support for roof garden on existing structure	Adequacy of existing structure to support new roof	Intrusive investigations will be undertaken and design revised as necessary	None	None	n/a.	JH	29/09/2009
<b>Use</b>									
	30-Sep-09	none							
<b>Maintenance</b>									
	30-Sep-09	None							
<b>Dismantling</b>									
	29-Sep-09	Link Bridge	Lifting off using crane	Glazed finishes to be dismantled prior to lifting walkway. Concrete floor may also need to be broken up and removed to reduce weight.	None providing contractor is competent for this type of erection.	Detailed method statement required.	Risk assessment will be included on structural drawings	JH	29/09/2009

#### IMS 16 Hazard and Risk Register

Registered Office: 31-33 Princess St, Manchester M2 4BF . telephone +44 (0)161 236 3303 . fax +44 (0)161 236 3603 . e manchester@bfaw.co.uk  
 Liverpool Office: Stanley Hall, Edmund St, Liverpool L3 9NG . telephone +44 (0)151 236 3303 . fax +44 (0)151 236 3603 . e liverpool@bfaw.co.uk  
 Buttress Fuller Alsop Williams is a trading name of Buttress Fuller Alsop Williams Limited Registered in England and Wales No. 5363573 www.bfaw.co.uk

**Preferred Option – drawings and images**



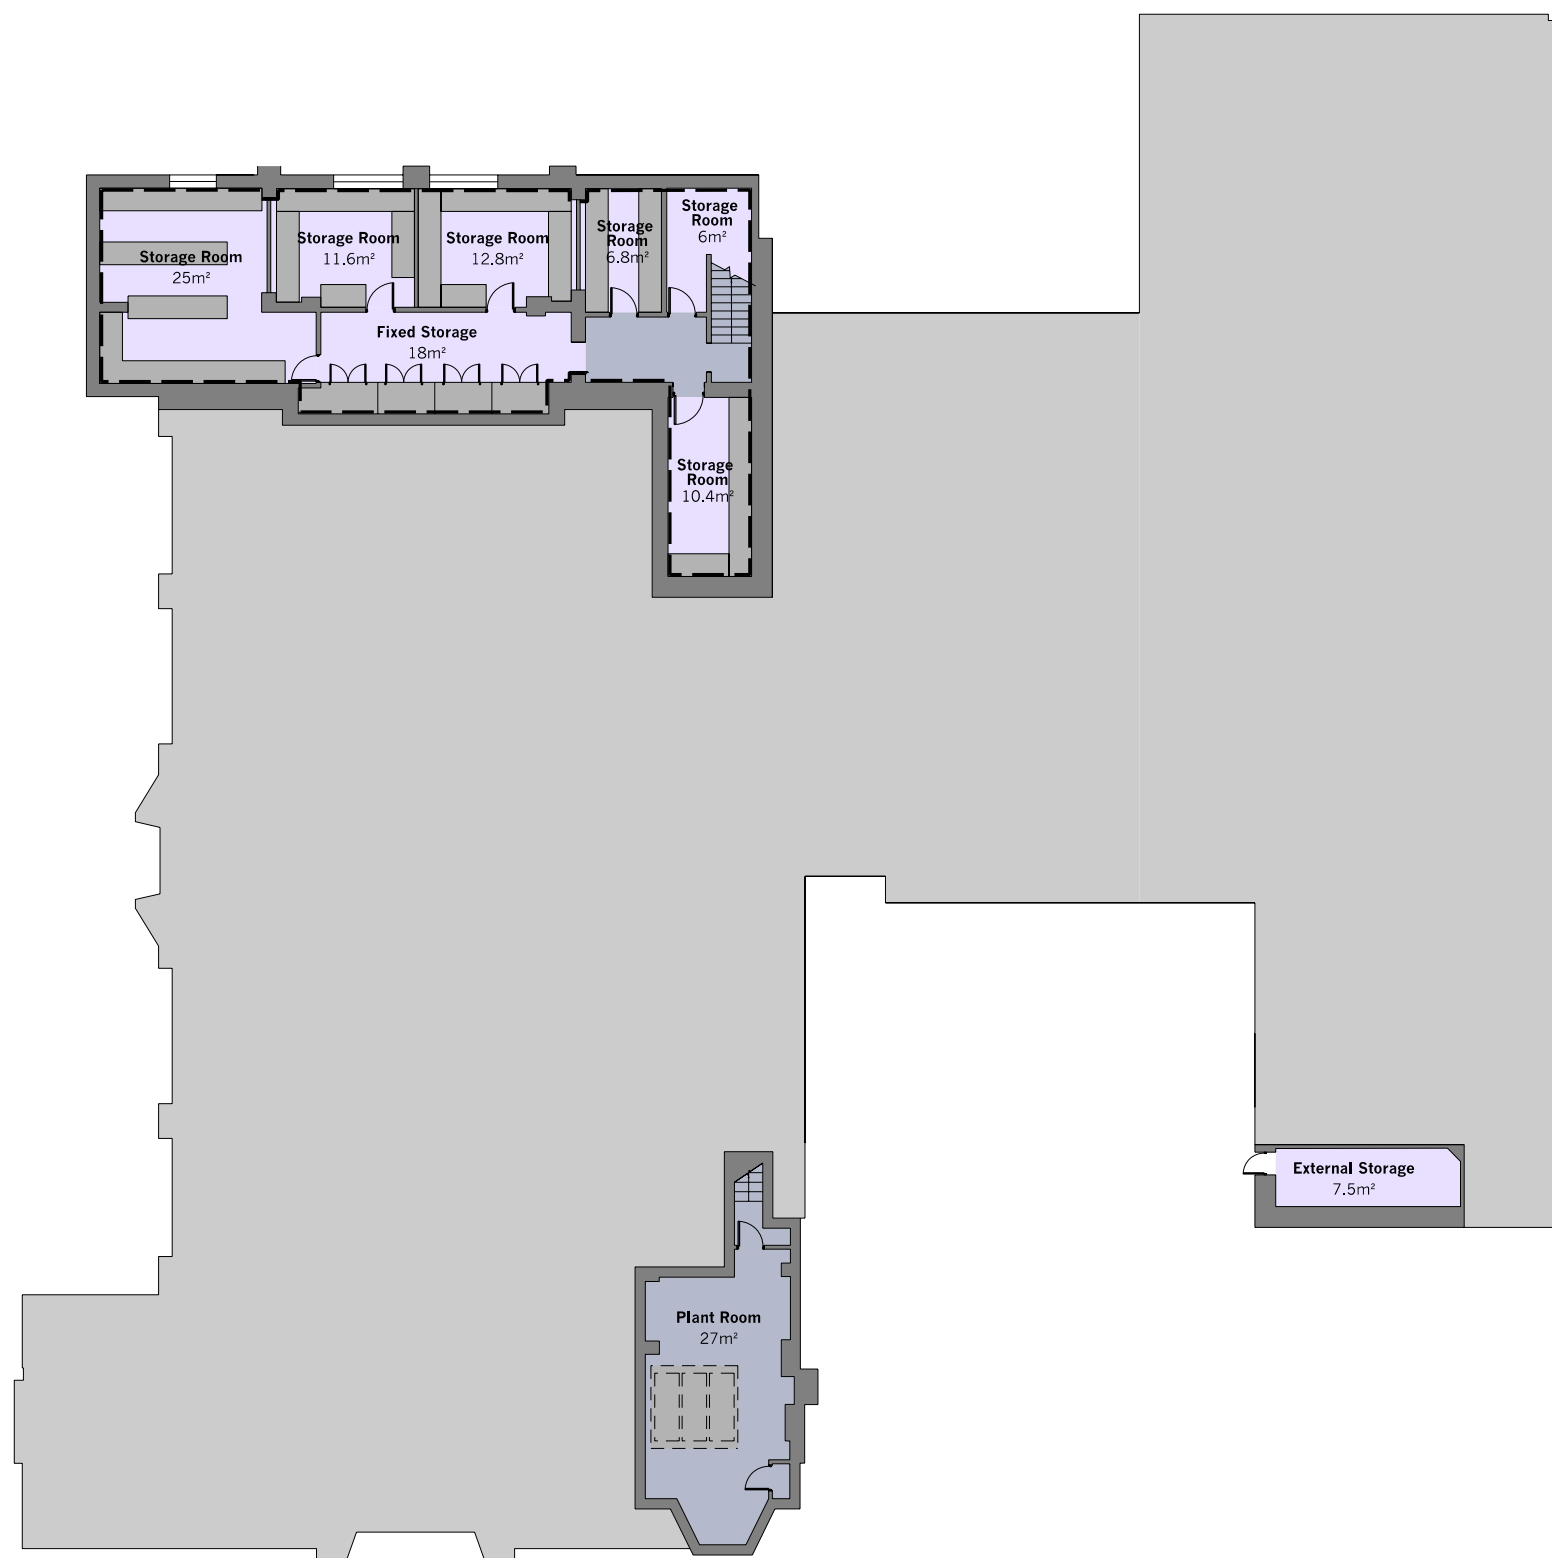

	Total Floor Areas
RETAIL	123m <sup>2</sup>
EXHIBITION / GALLERY	604m <sup>2</sup>
FLEXIBLE USE	51m <sup>2</sup>
COMMUNITY USE	399m <sup>2</sup>
OFFICES	148m <sup>2</sup>
MUSEUM STORAGE	158m <sup>2</sup>
TOILETS	44m <sup>2</sup>
CIRCULATION	287m <sup>2</sup>
ROOF TERRACE / GARDEN	128m <sup>2</sup>
	<b>1942m<sup>2</sup> TOTAL</b>

**Community use retained:**

- Lucas Room
- Stage Lowered
- Gymnasium used as Community Hall, Ancillary Storage & Showers.
- Local History Archive and Study Centre located on mezzanine





	Total Floor Areas
RETAIL	123m <sup>2</sup>
EXHIBITION / GALLERY	604m <sup>2</sup>
FLEXIBLE USE	51m <sup>2</sup>
COMMUNITY USE	399m <sup>2</sup>
OFFICES	148m <sup>2</sup>
MUSEUM STORAGE	158m <sup>2</sup>
TOILETS	44m <sup>2</sup>
CIRCULATION	287m <sup>2</sup>
ROOF TERRACE / GARDEN	128m <sup>2</sup>
	<b>1942m<sup>2</sup> TOTAL</b>

**Community use retained:**

- Lucas Room
- Stage Lowered
- Gymnasium used as Community Hall, Ancillary Storage & Showers.
- Local History Archive and Study Centre located on mezzanine






	Total Floor Areas
RETAIL	123m <sup>2</sup>
EXHIBITION / GALLERY	604m <sup>2</sup>
FLEXIBLE USE	51m <sup>2</sup>
COMMUNITY USE	399m <sup>2</sup>
OFFICES	148m <sup>2</sup>
MUSEUM STORAGE	158m <sup>2</sup>
TOILETS	44m <sup>2</sup>
CIRCULATION	287m <sup>2</sup>
ROOF TERRACE / GARDEN	128m <sup>2</sup>
	<b>1942m<sup>2</sup> TOTAL</b>

**Community use retained:**

- Lucas Room
- Stage Lowered
- Gymnasium used as Community Hall, Ancillary Storage & Showers.
- Local History Archive and Study Centre located on mezzanine



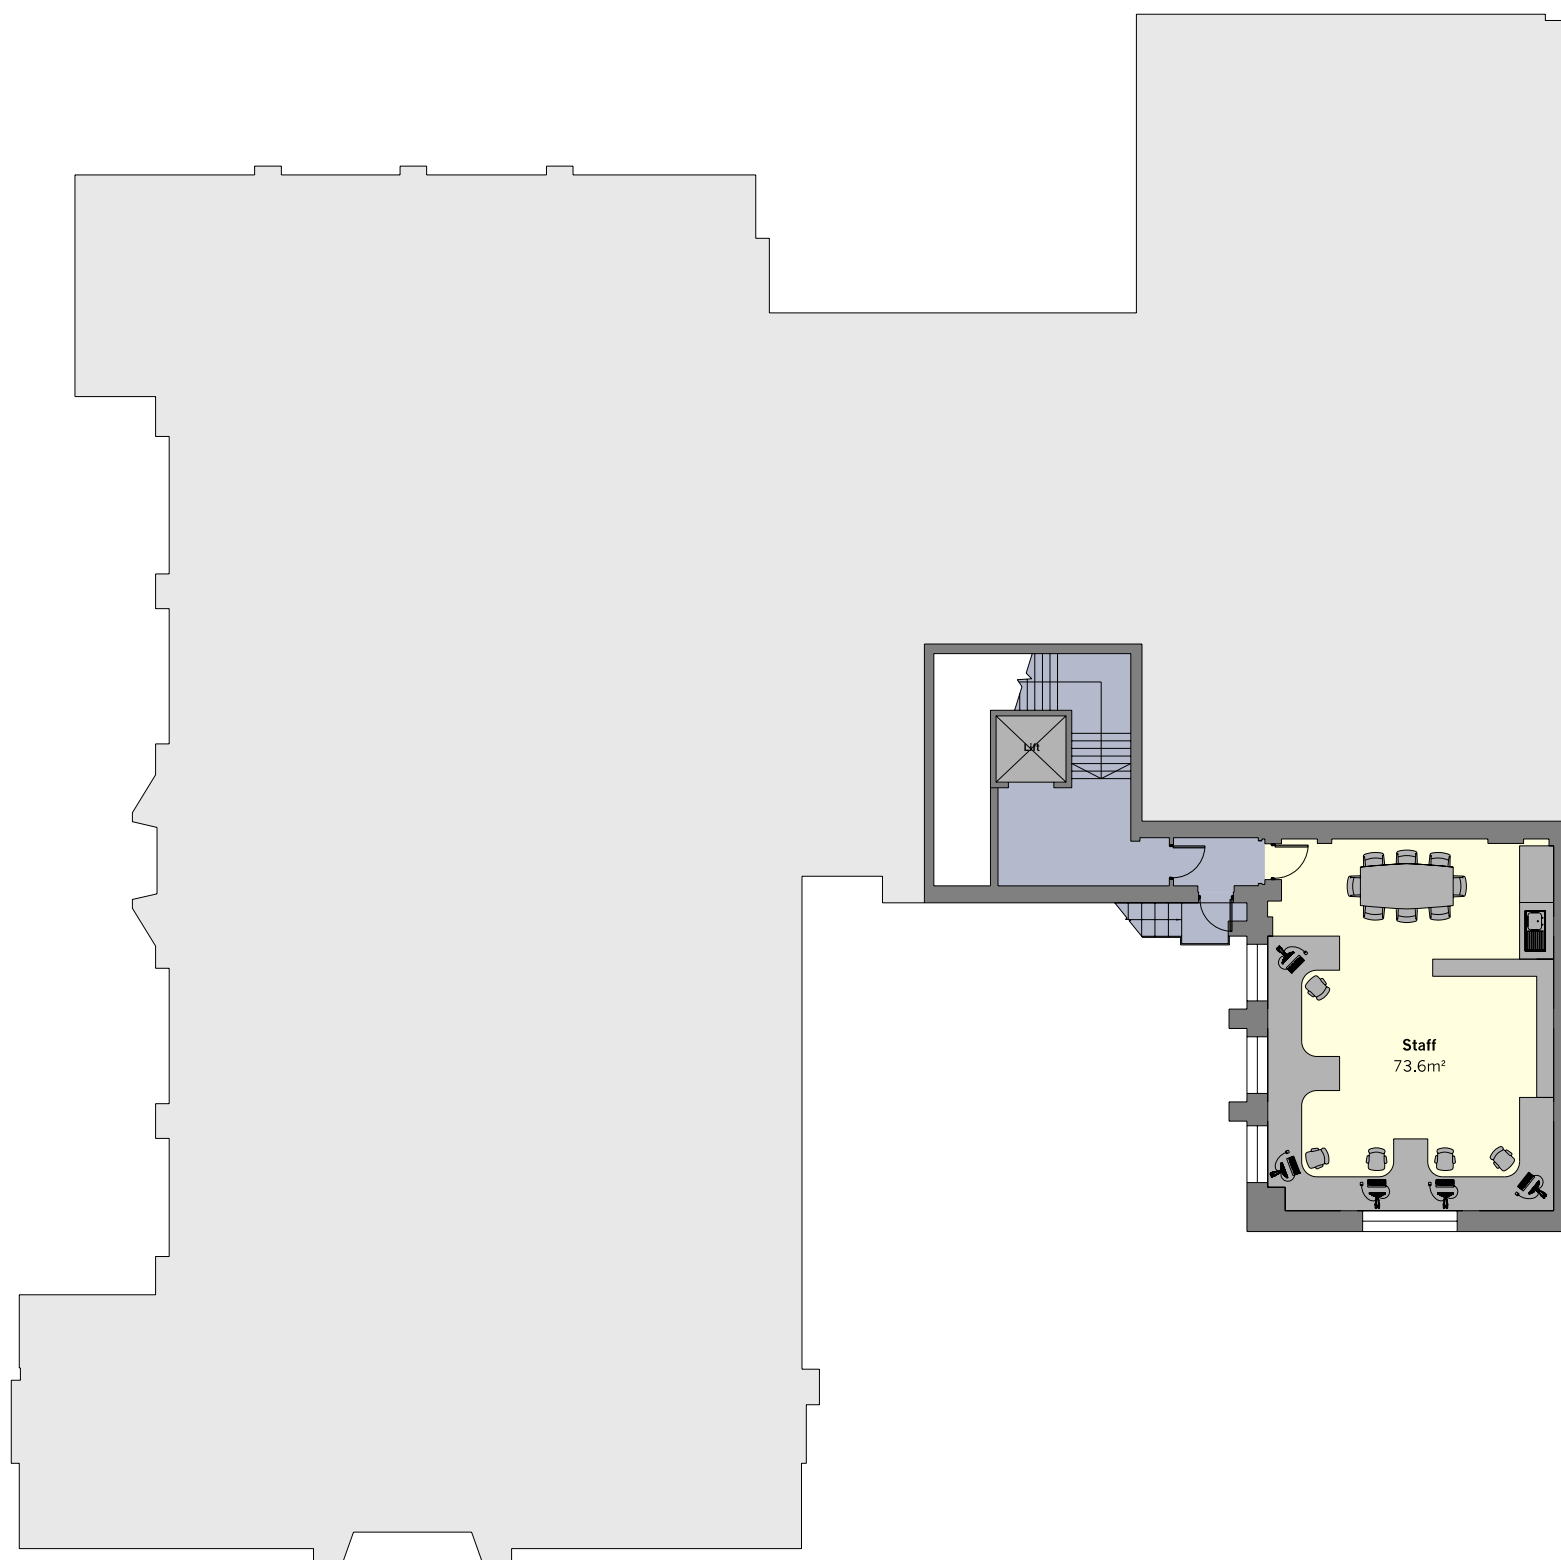

	Total Floor Areas
RETAIL	123m <sup>2</sup>
EXHIBITION / GALLERY	604m <sup>2</sup>
FLEXIBLE USE	51m <sup>2</sup>
COMMUNITY USE	399m <sup>2</sup>
OFFICES	148m <sup>2</sup>
MUSEUM STORAGE	158m <sup>2</sup>
TOILETS	44m <sup>2</sup>
CIRCULATION	287m <sup>2</sup>
ROOF TERRACE / GARDEN	128m <sup>2</sup>
	<b>1942m<sup>2</sup> TOTAL</b>

**Community use retained:**

- Lucas Room
- Stage Lowered
- Gymnasium used as Community Hall, Ancillary Storage & Showers.
- Local History Archive and Study Centre located on mezzanine









Neal Charlton 2009.